


ARB OWNERS ATTENTION: Some female plugs for control box to receiver connections are now available at \$1.00 per pair.


BC 223 OWNERS ATTENTION. We have at last obtained cords CD 477 with plugs for PE 125 to transmitter. Available at \$1.50 each.

This is YOUR Flyer - written to sell merchandise, sure - but also to offer helpful suggestions and information for our customers where we can. Maybe there is something we can include to help you, or perhaps you have a suggestion to pass on to our other customers; if so, please write us, and your interest will be greatly appreciated. Please keep in mind, though, that the Heath Company is primarily a manufacturer of radio and electronic equipment in kit form, and while we have surplus items available, we make no attempt to stock a complete line of radio needs. You will help us to help you more efficiently if you will not write to inquire about items we do not advertise, but will send your inquiries to one of the many fine radio supply houses located in the larger cities.

RECARDING DELIVERIES. As this FLYER goes to press, deliveries on VTVM, Oscilloscope and Amplifier kits are quoted three weeks from receipt of order; signal generator kits, immediate delivery. We hope to improve this situation and catch up with the tremendous demand soon.

Quly \$ 950

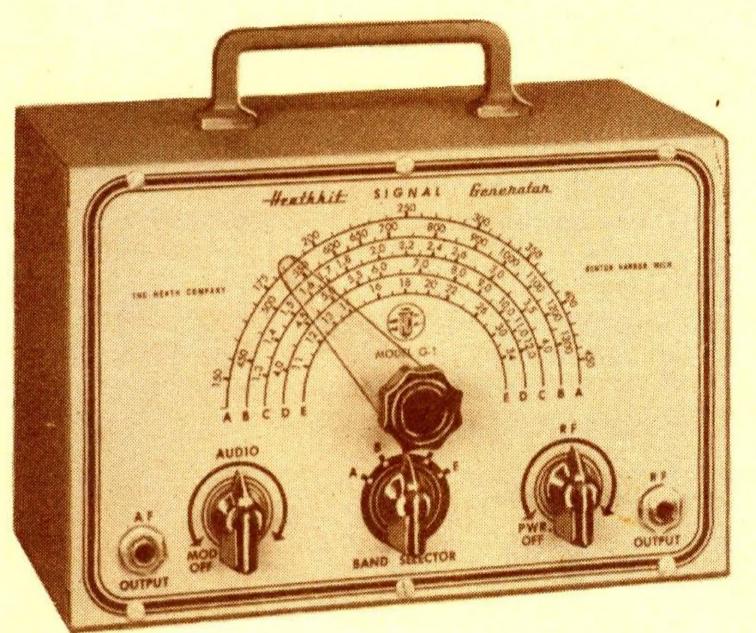



REAR

SIGNAL GENERATOR KIT

110 Volt 60 cycle operation with transformer power supply. Completely isolated from power line.

Can be used on any type receiver.

Supplies fundamentals from 150 KC to 34 MC in five bands.

Useful harmonics to over 100 MC for FM and television alignment. 400 cycle audio frequency modulation available separately for audio testing.

Supplies either pure RF or modulated signal.

Highly accurate calibration with calibration adjustment for exact frequency.


Approximately 30% modulation.

Uses 6SN7 as oscillator and audio frequency amplifier and 6X5 as transformer power supply rectifier.

Convenient, portable -- Dimensions 9" x 6" x 4 3/4" deep, weight 42 lbs.


The Heathkit Signal Generator supplies an RF signal of extremely pure wave form, and maintains an excellent linear output throughout its range. Its small size and light weight make it very convenient for carrying on jobs, or as a portable unit around the laboratory.

A SIMPLE F M RECEIVER

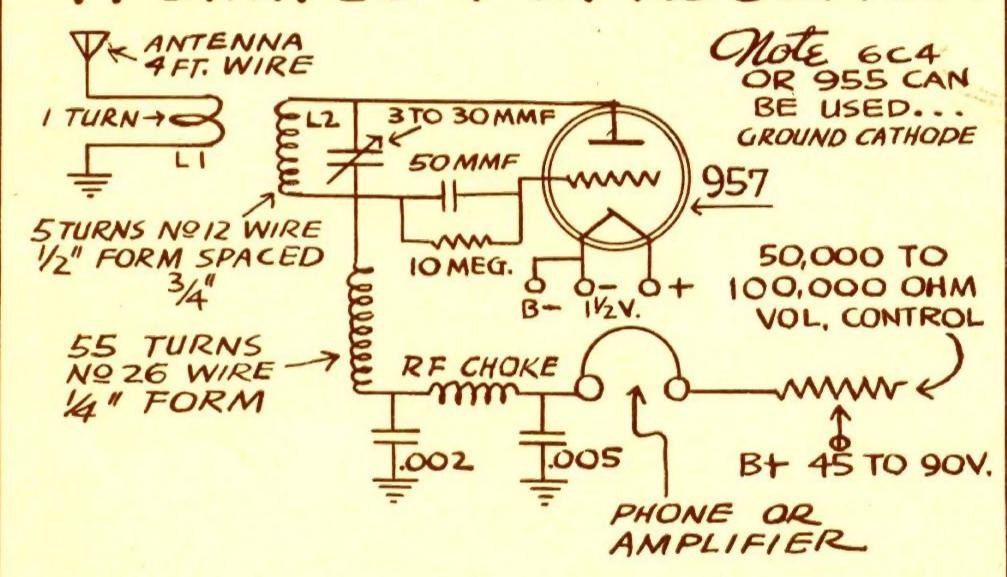

This is a super regenerative receiver for FM and will cover 90-110 MC. Vary the spacing of the L2 coil until the band is covered. The location of L1 is quite critical; vary it for best results. Distances of 75 miles have been achieved. This article is included for information only. The Heath Company does not supply the parts.

COMMAND SET MODULATOR

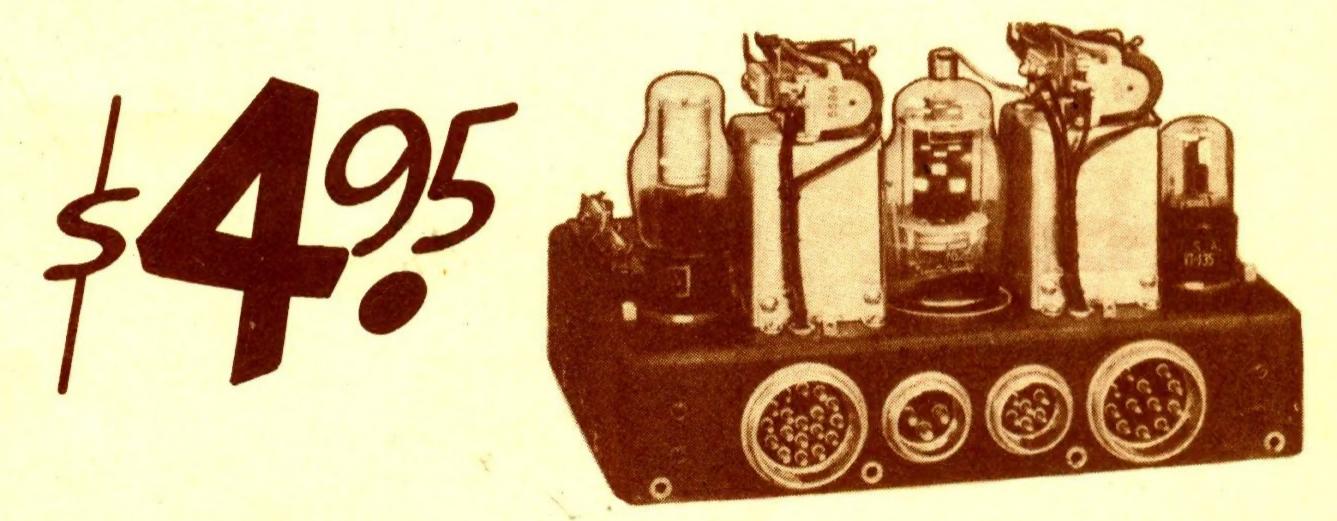

A companion modulator to the BC 457-58-59 and 696. It contains three husky relays, carbon microphone to grid transformer, power supply filter and bleeder resistors with VR 150 tube for constant output voltage. Also includes a 12J5 and 1625 tube. An excellent basis for building a high quality 8 watt mobile amplifier. Used, but in good condition, with tubes, relays, etc., less dynamotor. Shipping weight, 11 lbs.


BENDIX MN26C MARINE & AIRCRAFT RADIO COMPASS

> A brand new 12 tube radio compass which covers aircraft, marine and regular broadcast band 150-1500 KC Comes complete with instruction manual, shock mounting, 24 volt power supply (can be converted to 12 volts). 12 tubes in original carton. This is one of the last quantities of high quality compasses available and our stock is limited. Order now.

\$7495

BENDIX MN20E LOOP

Used with above receiver for direction finding, homing, establishing a fix, reception in snow and ice conditions, etc. 9" diameter.

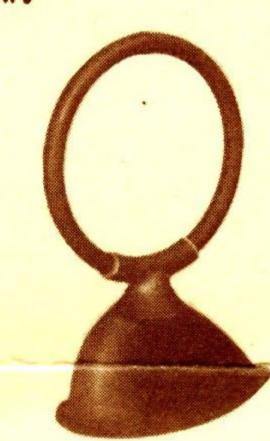

MAKING A CONTACT PRINTER


FROM SURPLUS ASTROGRAPH SMALL METAL


CLIP TO PRESS MICROSWITCH CONTACT

MICROSWITCH TO TURN ON LIGHT WHEN COVER IS PRESSED

MICROSWITCH AVAILABLE \$100 FROM US

MOTE REPLACE 24V. BULB WITH LARGER 110 V. BULB WHICH GIVES EVEN ILLUMINATION TO THE OPAQUE GLASS

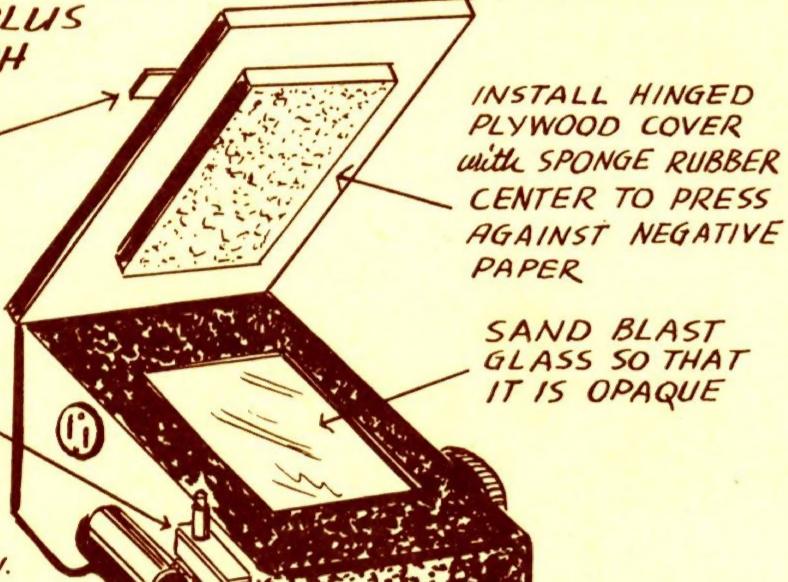

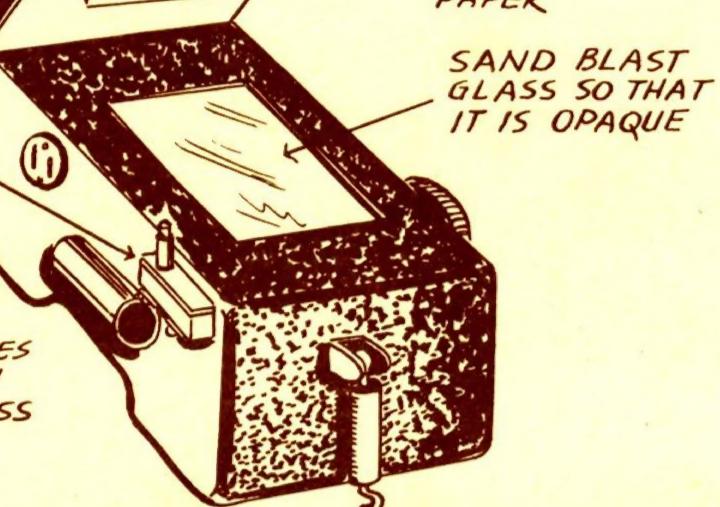



We have a fair stock of astrographs remaining. These come in a handy 3/8" quality plywood case with leather handle ideal for a camera or projector carrying case, a small tool box, tackle box, etc. Case measures inside 13 3/4" x 10 1/2" x 9" including eight handy separate compartments in the bottom. Astrograph and case only Shipping Wt. 20 lbs. . \$3.95


MULTITESTER BIAS METER 1-97A

Contains a zero center 35" round Marion voltmeter calibrated 0-100 volts each side. Movement is one mill each side of center. The unit is mounted in a steel box 7" x 5" x 42" and contains 8 contact push button, line cord dual 100 MFD at 200 V DC Aerovox condenser, a potentiometer, 6 1RC 1% wire wound non-inductive resistors: one 400 ohm, two 2500 ohm, one 5000 ohm, one 10,000 ohm, one 15,000 ohm.

Excellent for building a zero center multitester with ranges of 1 - 10 - 100 - 1000 volt. Complete brand new . . . Shipping weight 4 lbs.



SOCKET Special

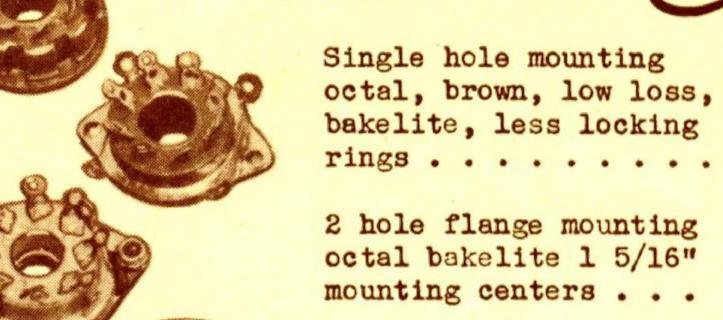

2 hole flange mounting octal bakelite 1 5/16" mounting centers . . .

Ceramic 2 hole flange mounting octals, 12" mounting centers . . .

Ceramic acorn sockets

25 FOR \$1.00

20 FOR \$ 1.00

10 FOR \$ 1.00

5 FOR \$ 1.00


FM&TELEVISION ANTENNA

The Army blade type antenna AN104A which was used on fighters makes an excellent FM and television aerial when mounted in pairs as shown. It is made of compreg and has a coaxial connector at its


base. The blades are 30" long and two form a perfect di- Purchaser Must pole antenna for FM band. Shipping weight 62 lbs. per pair.

Two Blades less Mounting, \$1.95

FOR Only

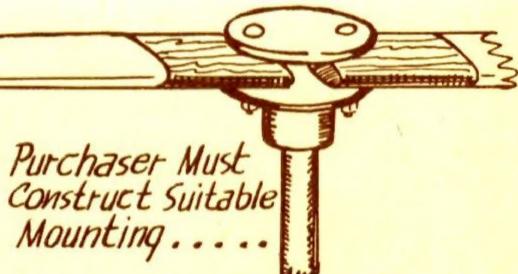

MOTOR FOR FLEXIBLE SHAFT TOOL

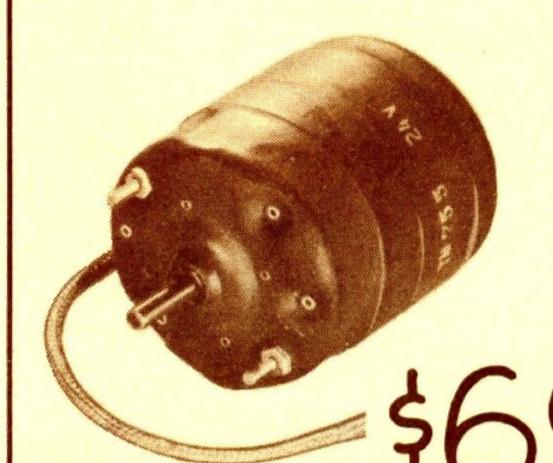

24 V Redmond 1/16 h.p. 3750 RPM supplied with 110V AC conversion kit. 1/4" shaft 7/8" long is ideal for building a flexible shaft, home workshop tool or powering model making machinery. Dimensions are 3" diameter 5" long. An extremely powerful small motor.


> Complete with Kit For Oper, from 110 V.A.C.

HEATHKIT VTVM KIT

- * 500 microamp meter
- * Balanced bridge circuit with 11 megohm input resistance
- * 110 volt, 60 cycle operation with transformer power supply
- * Electronic AC readings linear 20-20,000 cycles
- * Linear scales
- * Ohmmeter range .1 ohm to 1 billion ohms
- * AC and DC ranges 0 to 3, 30, 100, 300 and 1000 volts
- * db scale for amplifier measurements * 1% tolerance precision divider
- * Large clear plastic faced meter 32" x 3 3/4"
- * Convenient size case 6" wide x 9" high x 4 3/4" deep
- * Weight 6 pounds

resistors

- * Test prods included
- * 3 tubes--1 6SN7, 1 6H6, 1 6X5 included
- * Complete detailed blueprints for easy assembly

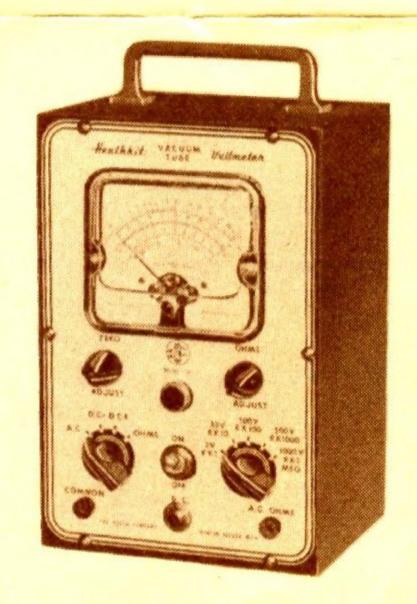

ADD POSTAGE FOR 8 LBS ...

Nothing ELSE TO BUY ...

Heath Transformer & Choke List No. 1




Output Transformer Couples 1 triode plate, 15,000 ohms at .003 amps. d.c., to 250 ohms. Frequency response 100-3000 cycles. No. 748 Wt. 6 oz

25¢

Input & Output Transformer Carbon microphone to grid and 185 plate to 150 ohm load. Two transformers in one case. No. 744 Wt. 4 oz.

25¢



Filter Choke


15. henries @ .060 amp. D.C. D.C. resistance 1600 ohms max. Hermetically sealed. Wt. $\frac{1}{2}$ 1b. \$1.00

No. 643

Modulation Transformer P.P. tubes, - 30,000 ohms plateto-plate @ .012 amperes D.C. to 10,400 ohms @ .024 amps. D.C. and to 3 ohms. Compound sealed.

No. 659 Wt. 4 02.

25¢



Output & Modulation Transformer Couples 2 tubes 3000 ohms plate-toplate 60 MA. D.C. to 3.4 ohm speaker voice coil or to 1.250 ohm at 80 ma. D.C. Max. power 4 Watt.

No. 745 Wt. 1 1b. 2 oz.

\$1.00

Filter Choke 8.0 henries min. @ .035 amps. D.C. 400 ohms resistance. Hermetically sealed.

No. 727

Wt. 12 oz.

50¢



Filter Choke

3 henries @ .060 amp. D.C. D.C. resistance 80 ohms max. Hermetically sealed.

No. 642

Wt. 12 oz. 3 for \$1.00

DOUBLE FILTER CHOKE Consists of two 3.5 henry coils@ .075 amp. D.C. D.C. resistance 200 ohms. No. 635 60¢

FILTER CHOKE 7.0 henries at .060 amps. D.C. 350. ohm resistance. No. 738 75¢

FILTER CHOKE 5 henries @ .040 amp. D.C. D.C. resistance 500 ohm. No. 636 50¢

Filter Choke

.15 henries @ .400 amp. D.C. D.C. resistance 12.5 ohms. Hermetically sealed.

No. 647

Wt. 1 1b.

25¢


Audio Choke

1.3 henries min. at .020 amps. D.C. 500 ohm resistance. Semi-

sealed.

No. 733 Wt. 2 oz.

15¢



Couples 3000 ohm plate or equivalent tube to push-pull parallel grids. Hermetically sealed.

No. 651

Wt. 6 oz.


75¢

Output Transformer Primary 80,000 ohms, CT. Sec. 1000 ohms. Freq. response 100-5000

cycles plus-minus 1 db. Semisealed.

No. 735 Wt. 1 1b.

20¢



4.5 henries @ .050 amp. D.C. D.C. resistance 215 ohms maximum. Her-


metically sealed.

No. 640 Wt. 10 oz.

50¢

Microphone Transformer Couples single button mike to 500 ohm line. Freq. response 300-3000 cycles. Hermetically sealed.

No. 737 Wt. \frac{1}{2} 1b. 25¢



Filter Choke

1.5 henries @ .100 amp. D.C. D.C. resistance, 50 ohms max. Hermetically sealed.


No. 641 Wt. 14 oz. 3 for \$1.00

OUTPUT TRANSFORMER Couples 6C4, or equivalent, to 500 or 5000 ohm line. One secondary used

Prices F.O.B. Benton Harbor--Express or Motor Freight shipment recommended. Quantities available 1,000 to 5,000 ea. (WE SHIP C.O.D.)



Heath Transformer & Choke List No. 1

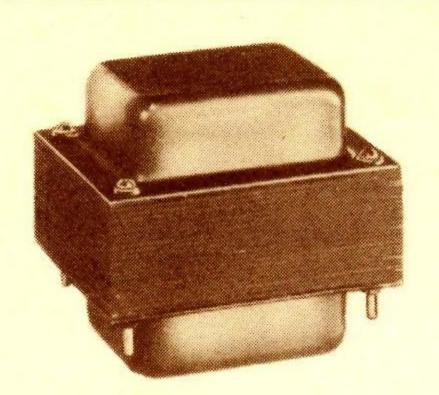

POWER TRANSFORMER SPECIAL Primary 117V 60 cycle. Secondaries 746 V CT at 220 MA, 6.3V at 4.5A, and 5V at 4A. Will handle 13 tube radio receivers. \$ 3.95 3 for \$ 9.95 Wt. 8 1bs. 8 oz.

Heavy Duty Fila-A ment Transformer Kenyon, Prima

\$2.00 Wt. 22 lbs.



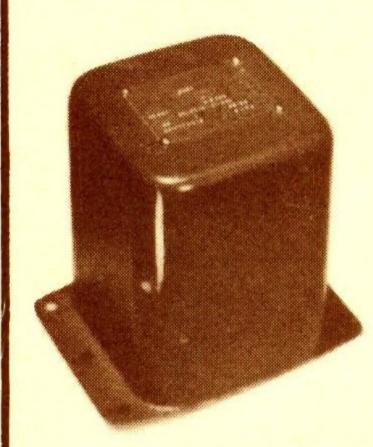


Plate Supply Transformer Primary: 115 V. 60 Cy. Secondary: 250-0-250 V., .130 amps., D.C. (condenser input). Semisealed in flange mounted case, solder-lug terminals out base. No. 603 Wt. 5 lbs. 4 oz. \$1.25


Power Transformer Primary 117 V. Sec. 6.3 at 2.1 amps, 312 V. D.C. at 100 mils, 5 V. 3 amps, hermetically sealed rectangular case. No. 1273 Wt. 7 lbs. \$2.50

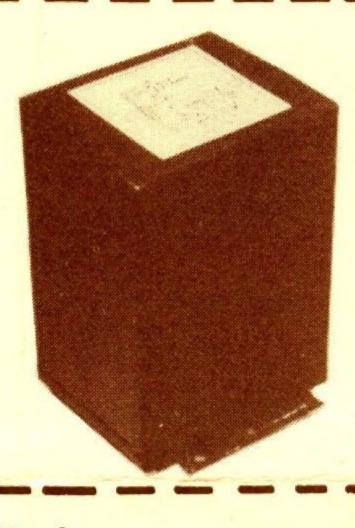


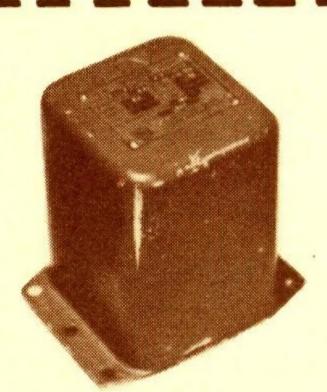

Filter Choke 6. henries at .150 amps. D.C. 100 ohms resistance. Hermetically sealed in flange mounted drawn steel case. Terminals out base. No. 739 Wt. 4 lbs. 2 oz. \$1.50

Filter Choke 6 Henries @ .080 amp. D.C. D.C. resistance 150 ohms. Hermetically sealed in stud mounted, drawn steel case measuring 2.66" X 2.23" X 2.91" deep. Terminals brought out base of unit. 75¢ No. 644 Wt. 1 1b. 10 oz.




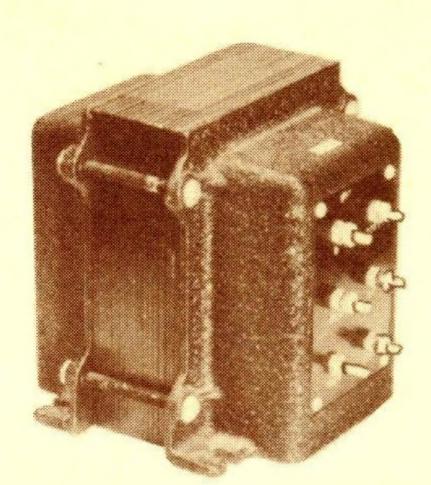

Transformer Primary 110-120 V. Secondary 550 Ct. at 1. amp. Fully mounted type construction in one end bell and fitted with screw type terminals. Mfg. by Gardner Electric Co. Two units make an excellent 550 watt isolation circuit. No. 799 Wt. 22 lbs. \$2.00


Audio Driver Transformer Couples 4 616 tubes in p.p. par. to 2-450 TL's. Can be used as modulation transformer. Maximum D.C. through secondary - 140 mils Max. power 100 watts. Freq. response 100-5000 cycles Turns ratio 2 to 1. Semi-sealed flange mounted case with screw

type terminals out base. No. 712 Wt. 4 lbs. 14 oz.

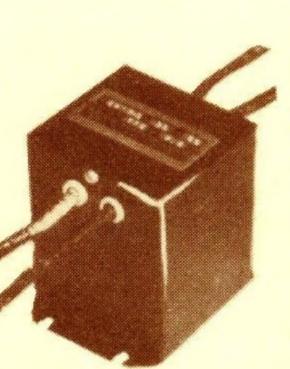


Filament Supply Transformer Primary - 115V., 60 cycles Secondary delivers 7.5 volts (no load). Unit is rated at 30 V.A. Unit semi-sealed in flange mounted fabricated steel case with rubber covered leads out sides. No. 601 Wt. 2 lb. 14 oz. 50¢

Output Transformer 9000 ohm plate to 500 ohm line. Max. power rating 1.5 watts. Freq. 300-3000 cps. Hermetically sealed. Terminals out base. 79¢





\$2.50

No. 649 Wt. 1 1b.



Microphone Transformer Carbon microphone to single grid. 40 to 1 turns ratio. Four mounting holes equipped with elastic stop nuts. Wt. & lb. No. 731 \$1.00

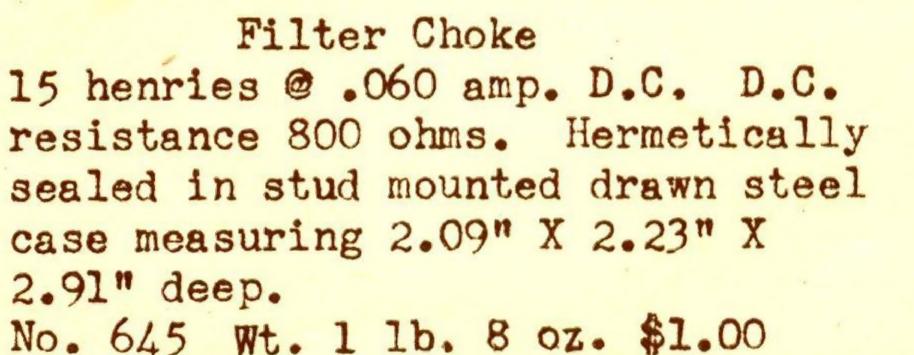

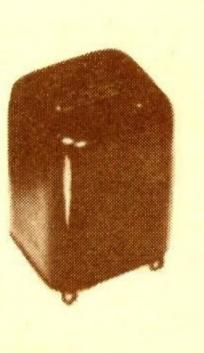


BENTON HARBOR, MICH. HEATH COMPANY



BOAT RADAR SET

These brand new U. S. Army radio altimeters AN/APN1 are excellent as small boat radar sets indicating in feet to the nearest object. Can be fixed to indicate object straight ahead or can be rotated manually. They operate in 420 megacycle range and indicator reads 0-400 and 0-4000 feet. Complete with 14 tubes, 28V dynamotor power supply, shock mounting, two antennas, indicator, indicator switch, all plugs and connectors and operating instruction manual in original sealed carton. Shipping weight 70 lbs.

POWER SUPPLY KIT

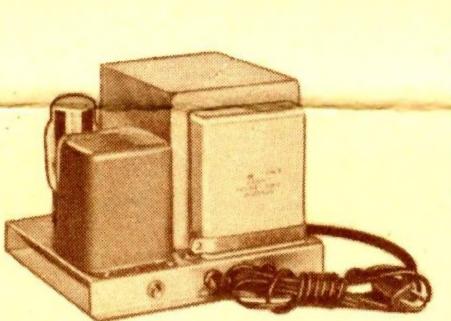

Ideal for BC645, 522, 223 and command set transmitters.

Complete kit supplies 500-600

V DC at 200 MA, 6.3 at 3.6

amps and 9 and 12 V AC. All

parts including chassis.

\$ 95

Shipping Wt. 22 LBS.

MILITARY RECEIVER ACCESSORIES

110V AC receiver power supply kit with 24V filament, no wiring changes inside set. Complete with chassis. For ARB, Command receivers, etc. Shipping wt. 7 lbs. . . \$ 5.95

POWER TRANSFORMER

Convert your military receivers without rewiring the filament. "A" type supplies 500 VCT at 50 MA, 5V at 2A and 24V at 1.2A. "B" type supplies 500 VCT at 50 MA, 5 V at 2A and 12V at 1 amp. State whether A or B type desired. Shipping weight 3 lbs. \$2.95

TIPS and COMMENTS

IS OUR FACE RED!! After our complicated dynamotor article in the October flyer, a customer wrote, "Why not simply reverse the armature and connect 110VAC to low voltage input?" -- It works, too!

Handy Information on Heathkit Equipment! A new sheet with schematics of Heathkit test equipment is available on request. Write for one to show your friends.

Heathkit Oscilloscope Owners. If you didn't receive a grid screen for your scope, we can give it to you now. Just drop us a card and it will be sent free.

Your letters are appreciated. Thanks to all who have sent friendly and encouraging compliments on our service and merchandise. We're trying above all to give good value in service and material. To the small minority whose experience has been a little rough, we're sorry. Let us do better next time.

General Electric BC 375 TUNING UNIT

Supplied with Conversion data to Transmitter - Receiver

A real buy for worthwhile spare parts. Over \$30.00 worth of new condensers, coils, switches, dials, etc. TU5B covers 1500 to 3000 KC, TU10B covers 9 to 12.5 MC and TU26B 200 to 500 KC. Transmitter-receiver conversion articles supplied for TU-5 can be used for other frequencies with slight modifications.



\$749


METER Special

Brand new DeJur model 312 0-800 M.A.

D.C. Square 3" 0-10 M.A. basic

meter with built in shunt. Probably
the best buy ever offered in a surplus meter. Shipping wt. 1 lb.

\$795



UNKNOWN


METER

Many have asked how to determine the basic movement of a meter.

FLASHLITE CELL POTENTIOMETER KNOWN METER

Connect as shown using known meter of higher range than unknown if possible. Be sure to have potentiometer set to zero (or counter-clockwise) position before making connections. Advance control slowly until one meter reads full scale. If this is the unknown its rating can be read on the known meter. On high current meters more than one battery may be required.

HEATHKIT HIGH FIDELITY AMPLIFIER KIT

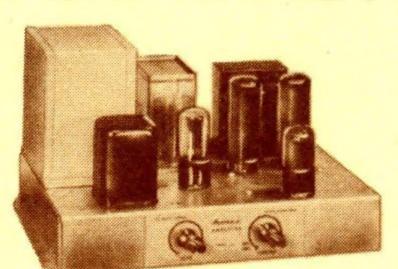

\$14.95

12" PM. SPEAKER \$6.95

Build this high fidelity amplifier and save two-thirds of the cost. Push pull output using 1619 tubes (military type 6L6's), two amplifier stages using a dual triode (6SN7), and a phase inverter give this amplifier a linear reproduction equal to amplifiers selling for ten times this price. Every part supplied: punched and formed chassis, transformers (including quality output to 3-8 ohm voice coil), tubes, controls, and complete instructions. Add postage for 20 lbs.

SHOW THIS TO YOUR BUTCHER .. LESS THAN 144 per LB.



MOTOROLA F-M TRANSMITTER- RECEIVER

Here's a buy to throw the radio experimenter into a fit of ecstasy for weeks. Enough equipment to clutter your whole house and give your wife grounds for divorce. Sealed up in lead boxes by the army with enough lead to warm a junk dealer's heart. Includes over 40 new tubes 2 TSl3 French-type handsets, 6 or 12Volt vibrator power supply, antenna mast, mast base for jeep mounting, connecting cables, instruction books, metal carrying cases, etc. etc.

A mobile FM unit covering the FM police networks with slight change. Vibrator power supply operates from either 6 or 12 volts at 3 amps.

Quantity limited. Shipping weight 180 lbs.


Excellent FOR POLICE OR RANCH USE..



CLOSE-OUT Special
BENDIX 433G

Radio Compass

\$ | 795

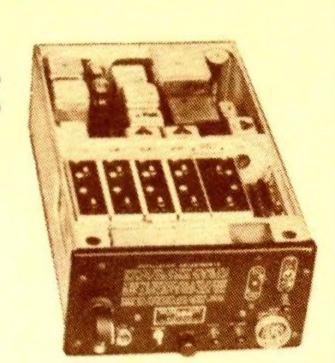


Broadcast band coverage with 15 six volt tubes, 5 gand condenser, two stages RF, electric motor driven band switch, etc. Can be converted to powerful home receiver. Used, with slightly battered cases, but insides like new. Tubes included if you're lucky, but please do not specify with tubes. Only 50 available.

Shipping weight . . . 60 lbs.

CONVERTING BC 746 TUNING UNIT 16 MIDGET TRANSMITTER

The BC 746 Tuning Unit makes an excellent midget CW 80 meter transmitter. The output is 1 Watt and working distances up to 500 miles have been reported. We intend publishing plans for converting the 746 to a companion receiver in an early Flyer.

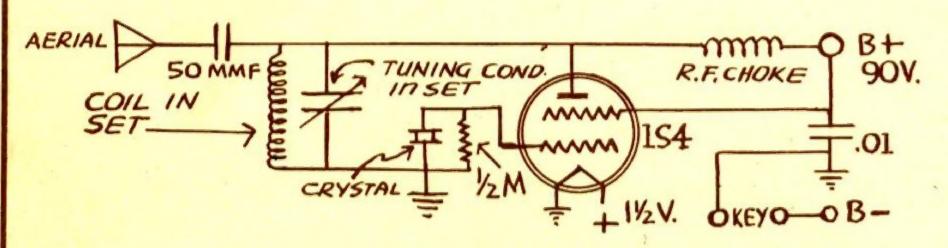

A complete kit is available for building this transmitter, the BC 746, 1S4 tube and socket, 80 meter crystal, crystal socket, RF choke, by pass condensers, with complete instructions and blue-prints. Shipping wt. 2 lbs. Only \$3.95.

The only accessories required are batteries & key.

Key, shipping wt. 1 lb.....\$1.00

 MARTHA WASHINGTON
12 CENTS 12

OSCILLOSCOPE KIT

* Frequency compensated vertical and horizontal amplifiers

* Beautiful two color panel

* Sweep circuit supplying 15 to 30,000 cycles

All controls on front panel

- * Ideal for television and radio trouble shooting
 * Convenient portable size -- weighs only 26 pounds
- * Cabinet dimensions 82" x 13" high by 17" deep
- * Provision for external synchronization

* Test voltage post on front panel


* Frequency response plus or minus 20% from 50 cycles to 50 KC

* Input impedance 1 megohm and 50 MMF

* Tubes supplied: 2 6SJ7, 2 5Y3, 1 884, 1 5BP1

* Operates from 110 volt 60 cycle AC

- * Power supply delivers 1100 volts negative, 350 volts positive, making 1450 volts available for the CR tube
- * All oil filled condensers used, assuring long life
- * Deflection sensitivity .65 volts per inch full gain

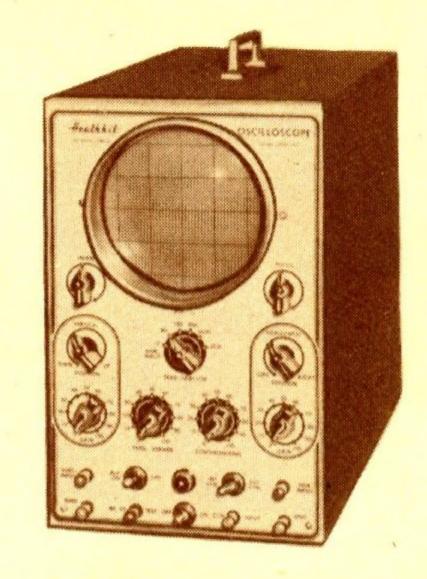



THE HEATH COMPANY
BENTON HARBOR, MICHIGAN
RETURN POSTAGE GUARANTEED

